City Silent LED - Eco

Model: ENV6UYECO


LUE O DIAMOND



Lighting Towers

6 x 160W



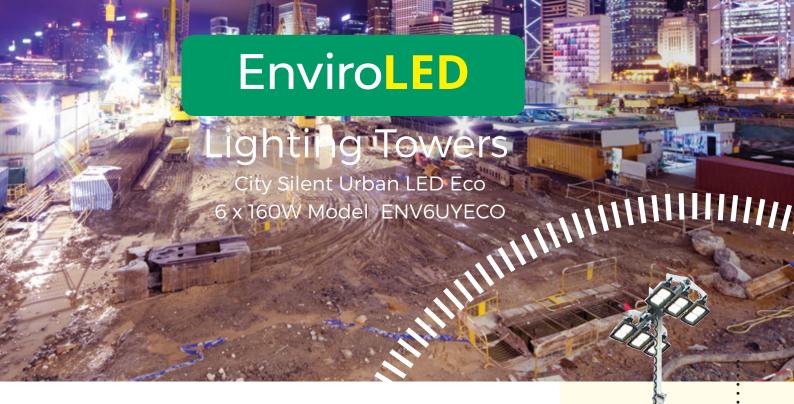

KEY FEATURES



· 6 x 160W Multi LED



· Massive 122100 Lumen



· 4200 M2 @ 20 Lux



· Easy to use Com Ap Inteli Nano Controller



 Super Fuel Efficient Kohler engine with 218 Hour Run Time



Italian made for tough Australian conditions, delivering super bright light for continuous night work in construction and civil works.





Lighting Towers Technical Specifications

Performance data	
Rated frequency / voltage	50 Hz / 230 V
Rated Power	3.5 kW
Operating temperature	-30/+50°C
Sound level	61 dB @ 7 m
Control unit	ComAp InteliNano
Engine	Kohler KDW 702
Speed	1500 rpm
Coolant	Liquid
Cylinders	2
Emissions	Stage V
Alternator	Linz Alumen
Rated outlet	3.5 kVA
Regulation	Brushless
Voltage accurancy	+/- 5%
Auxillary power	1.8 kVA
Fuel Consumption	0,55 l/h
Tank	1201
Fuel	Diesel
Running time	218 h
Galvanized mast height	8.5 m
Lifting system	Hydraulic
Rotation	350°
Wind resistance	110 km/h
Trailer	Road -towed trailer
Tyres	185/70R13
Basement	Bunded base 120%
Stabilizers	4+1
Canopy	Powder coating paint
Optional	
Optional included as standard:	Grid/engine selector Daylight sensor with Autostart AMOSS kit
Optional not included:	DeepSea control unit L401 wth weekly timer Battery Isolator Electric tilting head
Shipment	
Dimension	235x147x240 cm
Weight	850 kg
Truck	10
Container 40"HC	10



EnviroLED

Lighting Area (see MultiLed head on front page)

